

20-Station 316L Air Manifold - Valved Inlet - Double Aligned - Lockable - PED Approved.

Applications

- Instrument Air distribution
- Signal Air Isolation
- Signal Air lock-out

Technical Specifications

Manifold Body:	316L-TP ASTM A312/ASME
Isolation Valves:	ASTM-A351-CF8M
Inlet Isolation Valve Port:	Rp 3/4" BSPT or NPT
Outlet Isolation Valve Port:	Rp 1/4" BSPT or NPT
Drain Valve Port:	Rp 1/4" BSPT or NPT
Stem Packing:	PTFE
Valve Stem:	316 Stainless Steel
Valve Sleeve:	Red Vinyl Plastic
End Fittings:	316L-TP ASTM A 276-10
Isolation Valves Certified:	PED 97/23/EC
Manifold Cert Compliance:	PED 97/23/EC


Operating Temperature:	-20 to +150°C
Working Pressure:	150 psi (10bar)
Factory Test Pressure:	215 psi (15bar)
Outlet Valve Ratings:	See Graph

O.A.L. c/w Drain Valve:	682mm
O.A.L. w/o Drain Valve:	720mm
Isolation v/v Spacing:	50 mm
Surface Finish:	Standard Polish



Order Code

Description	Part Number
20-Stn 316 Air Manifold	AH34RP20DL-14RC2
Valved Inlet.	
Lockable.	

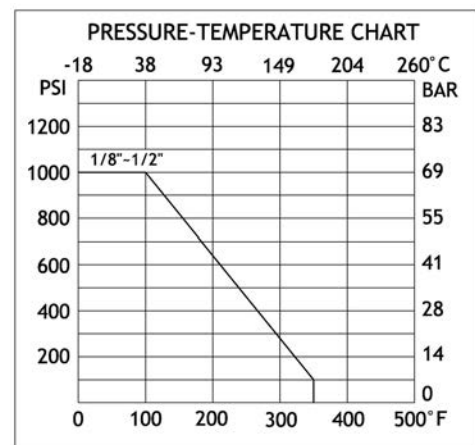

20-Station 316L Air Manifold - Direct Mounting - Double Aligned - Lockable - PED Approved

Product Features

Traceability: Each RCC Manifold carries a unique identifying code. This code provides a method for tracing materials and is an important part of quality assurance and control.




Output Connections: Rp 1/4", 316 Compression, Quick Fit.

Lockable: All RCC Manifold Valves are lockable.

Logos: Available (quantity dependent)



Special products can be supplied to order. Quantities required will affect unit price and initial leadtime may be extended.

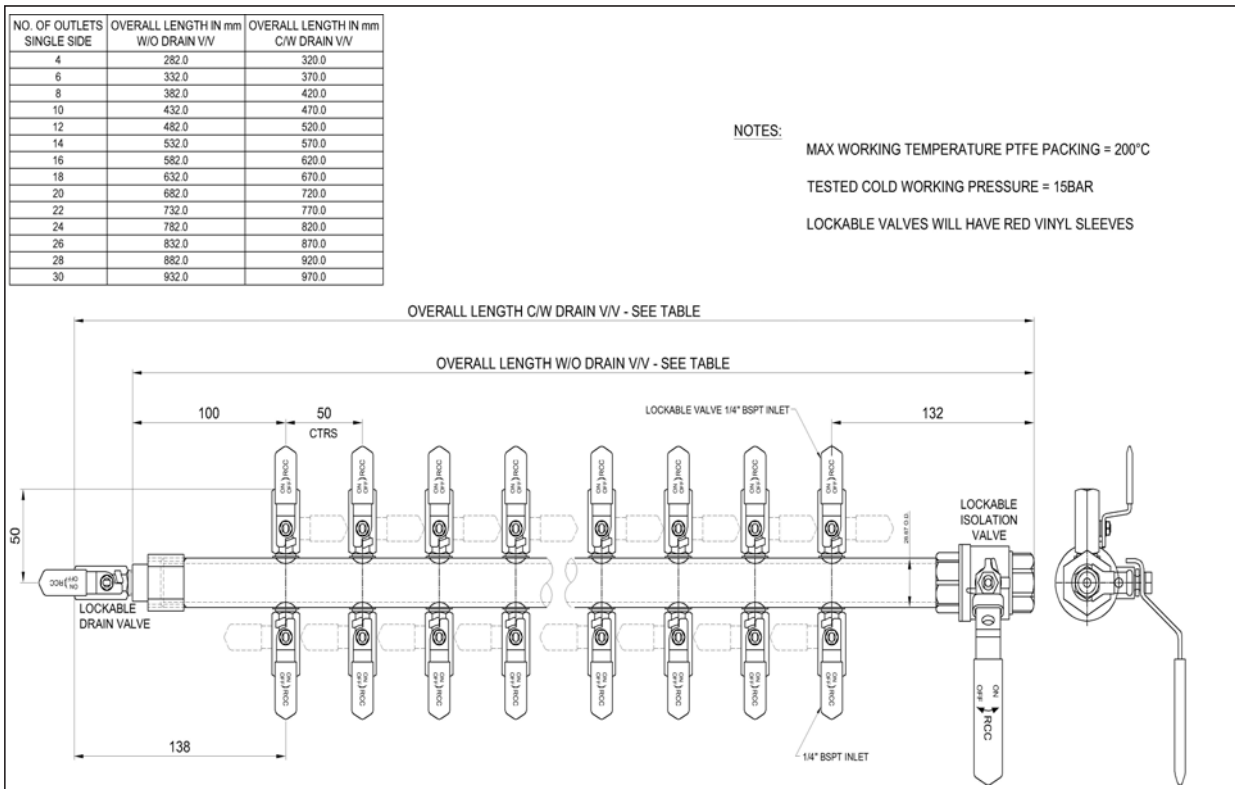

Design and materials may change without notice