

5-Station 316L Air Manifold - Valved Inlet - Left Aligned - Lockable - PED Approved.

Applications

- Instrument Air distribution
- Signal Air Isolation
- Signal Air lock-out

Technical Specifications

| | |
|-------------------------------------|------------------------|
| Manifold Body: | 316L-TP ASTM A312/ASME |
| Isolation Valves: | ASTM-A351-CF8M |
| Inlet Isolation Valve Port: | Rp 3/4" BSPT or NPT |
| Outlet Isolation Valve Port: | Rp 1/4" BSPT or NPT |
| Drain Valve Port: | Rp 1/4" BSPT or NPT |
| Stem Packing: | PTFE |
| Valve Stem: | 316 Stainless Steel |
| Valve Sleeve: | Red Vinyl Plastic |
| End Fittings: | 316L-TP ASTM A 276-10 |
| Isolation Valves Certified: | PED 97/23/EC |
| Manifold Cert Compliance: | PED 97/23/EC |


| | |
|-------------------------------|-----------------|
| Operating Temperature: | -20 to +150°C |
| Working Pressure: | 150 psi (10bar) |
| Factory Test Pressure: | 215 psi (15bar) |
| Valve Pressure Rating: | See Graph |

| | |
|--------------------------------|-----------------|
| O.A.L. c/w Drain Valve: | 470mm |
| O.A.L. w/o Drain Valve: | 432mm |
| Isolation v/v Spacing: | 50 mm |
| Surface Finish: | Standard Polish |



Order Code

| Description | Part Number |
|-------------------------|------------------------|
| 5-Stn 316L Air Manifold | AH34RP5L-14RC2L |
| Left Aligned. | |
| Lockable.Valved Inlet. | |

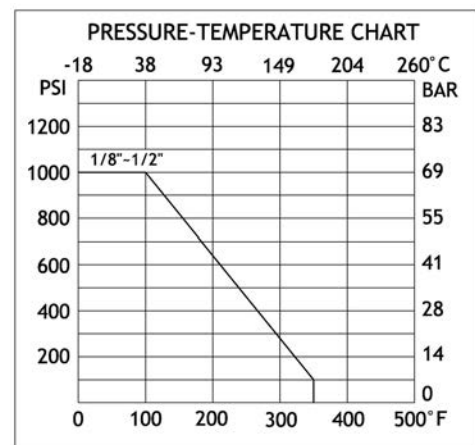

5-Station 316L Air Manifold - Valved Inlet - Left Aligned - Lockable - PED Approved

Product Features


Traceability: Each RCC Manifold carries a unique identifying code. This code provides a method for tracing materials and is an important part of quality assurance and control.




Output Connections: Rp 1/4", 316 Compression, Quick Fit.

Lockable: All RCC Manifold Valves are lockable.

Logos: Available (quantity dependent)



Special products can be supplied to order. Quantities required will affect unit price and initial leadtime may be extended.

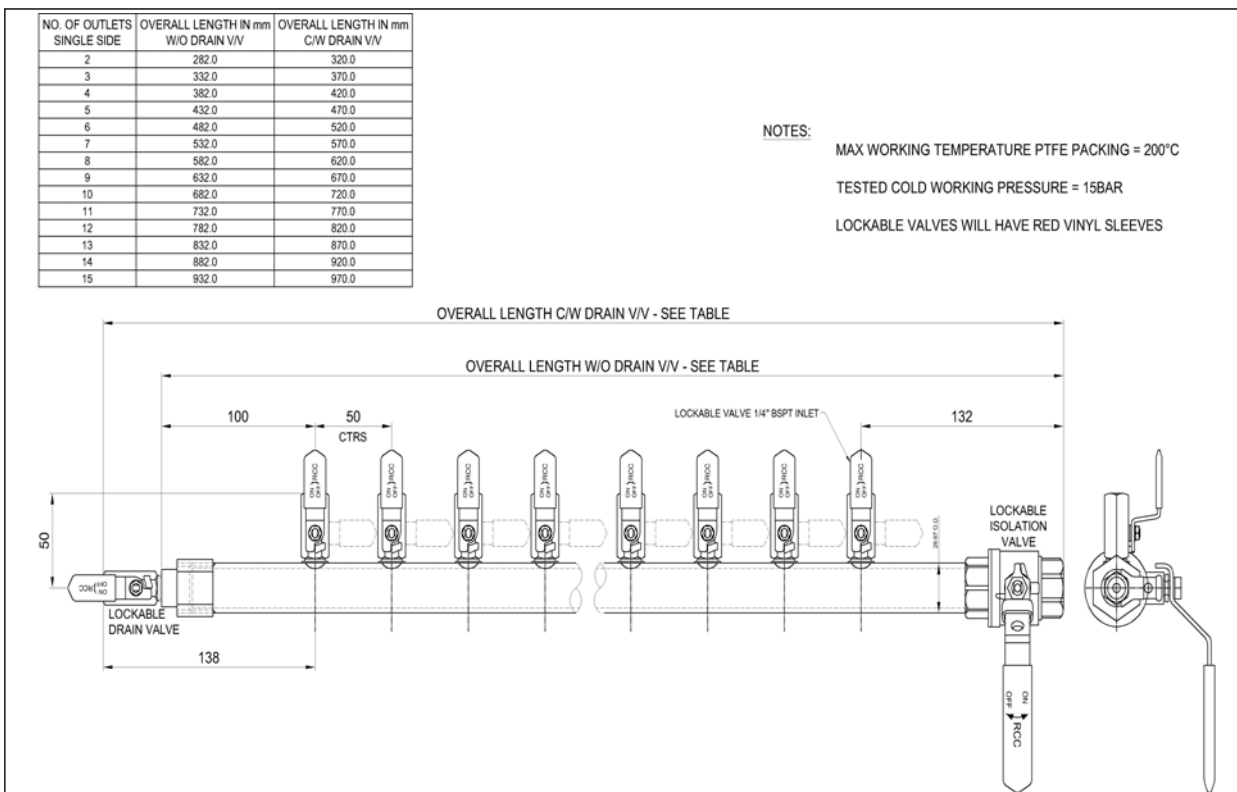

Design and materials may change without notice